


Wallbox/Floor Mounted AC EV Charger


NACS connector

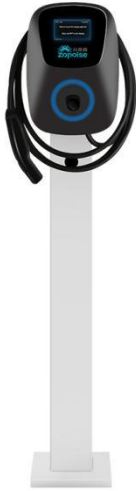

Product Features :

- Highly compatible with new energy vehicle charging interfaces/protocols.
- Multi-intelligent detection: real-time voltage/current monitoring, precise power calculation & safety protection.
- 4.3" display: real-time standby/charging/fault status & parameters.
- Authorization modes: plug-and-charge, card swipe, APP/scan/QR code, button scheduling.
- Charging modes: auto-full, timed charging.
- 4-level adjustable current with memory (auto-restores last gear on power-up).
- OCPP 1.6 protocol enhances flexibility, scalability & data security.
- Load balancing system optimizes power distribution across multiple chargers for stable operation.
- Remote O&M platform enables device health diagnosis, fault (early warning) & OTA upgrades to reduce costs.
- Product certified with ETL&CETL, FCC, IC, TÜVmark, CE; compliant with CCC.

Applications :

- Suitable for home use in residential areas, private houses, and condos.
- Suitable for commercial use in office buildings, urban complexes, etc.
- Suitable for parking lots, public charging station, etc
- Suitable for New Energy Vehicle 4S Stores, workshop commissioning, driving school, etc.

Specifications :

Item	ZB04-X007KXX-X001	ZB04-U09K6XX-X001	ZB04-X011KXX-X001	ZB04-X022KXX-X001
Input Voltage	AC220V±20%(CN) AC230V±10%(EU) AC240V±15%(US)	AC240V±15%(US)	AC240V±15%(US) AC380V±20%(CN) AC400V±10%(EU)	AC380V±20%(CN) AC400V±10%(EU)
Input Frequency	50/60Hz±1Hz			
Output Power	7kW	9.6kW	11kW	22kW
Current	32A	40A	48A/16A (3-phase)	32A (3-phase)
Display Size	4.3 inches(Options : LCD digital screen or digital tube)			
Communication	RFID, WIFI& Bluetooth, 4G, Ethernet			
Gun Cable Length	3.5m/5m/7m/7.5m			
Temperature / Humidity	-30 ~ +50°C/5%~95%RH			
Protection	Unplugged gun: IP65, Plugged gun: IP54			
Appearance Size	368mm×256.5mm×130mm			
Product Weight	< 7.2KG			
Leakage Protection	Type A+DC6mA(CN)/Type A RCBO AC 30mA +IΔdc 6mA(EU)/CCID20(US)			